
mu-X	3.0 AT	3.0 AT
DRIVE CONFIGURATION	4X2	4X4
EXTERIOR FEATURES		
Roof Rails	Standard	Standard
Rear Window Wiper	Standard	Standard
Rear Spoiler	Standard	Standard
INTERIOR FEATURES		
Power-Assisted Steering (PAS)	Standard	Standard
Steering Column Adjustment	Manual / Tilt	Manual / Tilt
Leather Steering Wheel with Multi-Function Controls	Standard	Standard
Gearknob Trim	Urethane with Decorative Plate	Urethane with Decorative Plate
Seating Capacity	7	7
Front Seat Configuration	Reclining Bucket Seats (x2)	Reclining Bucket Seats (x2)
Second-Row Seat Configuration	60:40 Fold-Flat Bench	60:40 Fold-Flat Bench
Third-Row Seat Configuration	50:50 Fold-Flat Bench	50:50 Fold-Flat Bench
Seat Trim	Partial Leather	Partial Leather
Seat Adjustment	Driver – 6-Way Power Adjustment	Driver – 6-Way Power Adjustment
Seat Adjustment Seatbelt Reminder	Driver - 6-way Power Adjustment Driver & Passenger	
Rear Seat Centre Armrest	Standard with 2 Cupholders	Driver & Passenger Standard with 2 Cupholders
Storage Pockets behind Front Seats	Standard Standard	Standard
Floor Trim	Carpet with Heel Pad	Carpet with Heel Pad
Driver Footrest	Standard	Standard
Air-Conditioner	Automatic Climate Control with Rear Cabin Cooling Vents	Automatic Climate Control with Rear Cabin Cooling Vents
Rear Heater Ducts	Standard	Standard
Inside Rear-View Mirror	Day / Night	Day / Night
Sunvisor	Driver with Ticketholder & Passenger with Vanity Mirror	Driver with Ticketholder & Passenger with Vanity Mirror
Overhead Console with Sunglasses Holder	Standard	Standard
Digital Clock	Standard	Standard
Cruise Control	Standard	Standard
Multi-Information Display (MID)	Standard	Standard
Dashboard Illumination Control	Standard	Standard
Power Windows	All with Driver One-Touch, Jam Protection & Timer	All with Driver One-Touch, Jam Protection & Timer
Auxiliary 12-V Power Socket	2	2
USB Charge Ports (Front and Rear)	Standard	Standard
Lockable Glove Box	Standard with Illumination	Standard with Illumination
Door Trim with Storage Pockets & Integrated Cupholders	Standard	Standard
Floor Tunnel / Console with Integrated Cupholder	Standard	Standard
Centre Console Storage Box with Lid	Standard	Standard
Storage Box	Standard	Standard
Rear Privacy Windows	Standard	Standard
Fixed Rear Window with Defogger	Standard	Standard
INFOTAINMENT		
Audio System	8" Touchscreen with RDS, MP3, Bluetooth® Audio Streaming with Integrated Mobile Hands-Free & Rear-View Camera	8" Touchscreen with RDS, MP3, Bluetooth® Audio Streaming with Integrated Mobile Hands-Free & Rear-View Camera
Audio Input Terminal: USB, Auxiliary	Standard	Standard
No. of Speakers	8	8
Steering Wheel Audio Controls	Standard	Standard
OPTIONS		
Audio System	9" Touchscreen with RDS, Bluetooth® Audio Streaming, Bluetooth® Phone, 2DIN Flush, Navigation, Rear-View Camera	9" Touchscreen with RDS, Bluetooth® Audio Streaming, Bluetooth® Phone, 2DIN Flush, Navigation, Rear-View Camera
Metallic Paint	Available	Available
Differential Lock	Available	Available
WARRANTY / SERVICE INTERVALS		
Warranty	3 Years / 100 000 km	3 Years / 100 000 km
Anti-Corrosion Warranty	3 Years / Unlimited km	3 Years / Unlimited km
Service Intervals	5 000 km / 10 000 km / 15 000 km	5 000 km / 10 000 km / 15 000 km
	2 222 13 300 Mil.	2 222 13 300 MH

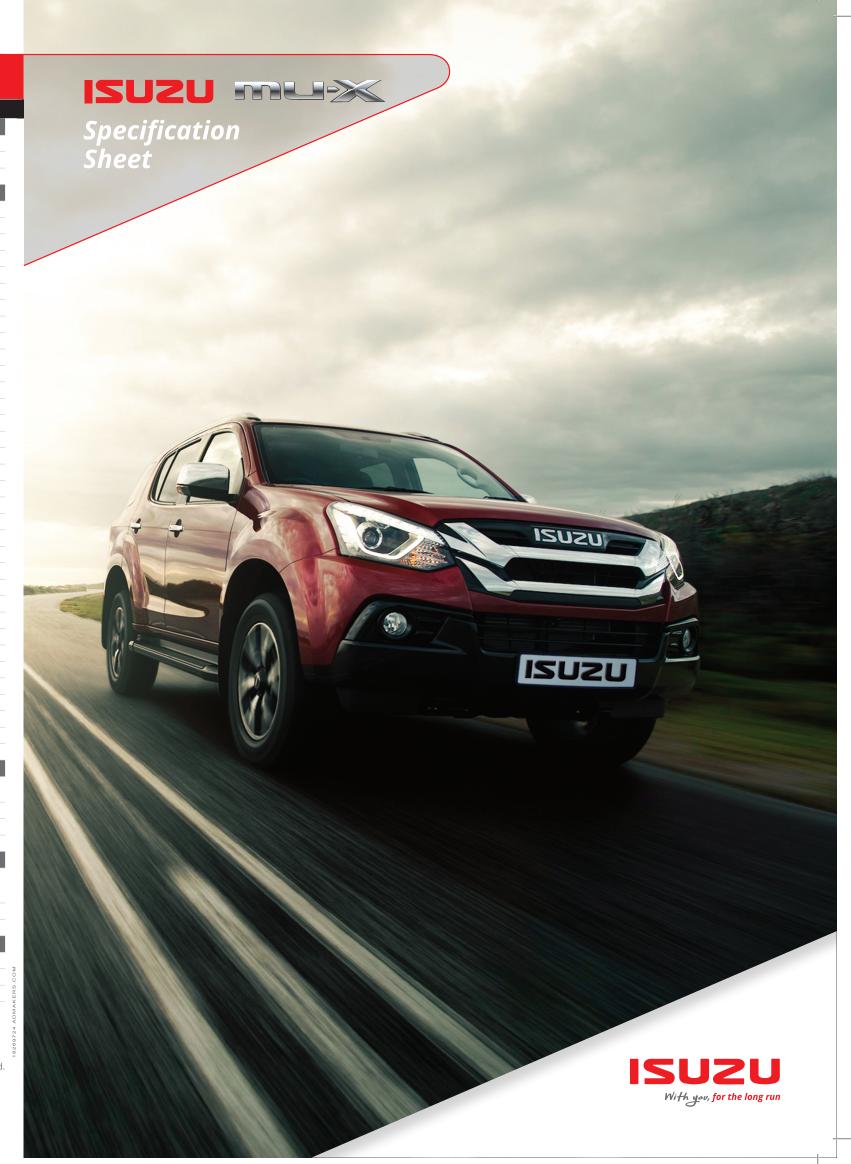

Fuel Economy & CO₂ data as per ECE R101 / SANS 20101 Regulation. Note that the actual fuel consumption will depend on many factors, including the driver's driving habits, prevailing conditions & the vehicle's equipment, condition and use.
 Towing capacity subject to South African Road Traffic Act. The weight of the towing vehicle including trailer towball load must not exceed the Gross Vehicle Mass (GVM). The combined weight of the fully loaded vehicle and trailer must not exceed the Gross Combination Mass (GCM). Maximum individual axle loads (GA1 & GA2) must not be exceeded. (e.g. if a 3.0 Litre Diesel is towing 3 500 kg its Maximum Vehicle Mass is 2 500 kg in order to be within GCM).
 Disclaimer: Specifications correct as at time of printing and may subsequently change. Please contact your nearest dealer to confirm any specification changes.

mu-X	3.0 AT	3.0 AT
DRIVE CONFIGURATION	4X2	4X4
ENGINE		
Engine	4Jj1tc Hi	4Jj1tc Hi
Displacement (cc)	2 999	2 999
No. of Cylinders	4	4
Compression Ratio	17.3:1	17.3:1
Bore X Stroke (mm)	95.4 X 104.9	95.4 X 104.9
No. of Valves	16	16
Power @ r/min (kW)	130 @ 3 600	130 @ 3 600
Torque @ r/min (Nm)	380 @ 1 800 - 2 800	380 @ 1 800 - 2 800
Turbocharger	Standard	Standard
FUEL CONSUMPTION ¹		
Combined Cycle (I/100 km)	7.3	7.9
Combined CO, Emissions (g/km)	194	208
Fuel Type	Diesel	Diesel
TRANSMISSION		
Transmission Type	6-Speed Automatic	6-Speed Automatic
Gear Ratio: 1st	3.600	3.600
Gear Ratio: 2nd	2.090	2.090
Gear Ratio: 3rd	1.488	1.488
Gear Ratio: 4th	1.000	1.000
Gear Ratio: 5th	0.687	0.687
Gear Ratio: 6th	0.580	0.580
Gear Ratio: Reverse	3.732	3.732
4WD Selector	-	Standard
Low Range Ratio	-	2.482
FRONT DIFFERENTIAL		
Axle Ratio: Final Drive	-	3.727
REAR DIFFERENTIAL		
Axle Ratio: Final Drive	3.727	3.727
CHASSIS DESIGN		
Front Wheel Suspension	Independent High-Ride Coil	Independent High-Ride Coil
Front Wheel Suspension Rear Wheel Suspension	Independent High-Ride Coil Multi-I ink Coil	Independent High-Ride Coil Multi-Link Coil
Rear Wheel Suspension	Multi-Link Coil	Multi-Link Coil
Rear Wheel Suspension Shock Absorbers	Multi-Link Coil Gas	Multi-Link Coil Gas
Rear Wheel Suspension Shock Absorbers High-Ride Suspension	Multi-Link Coil Gas Standard	Multi-Link Coil Gas Standard
Rear Wheel Suspension Shock Absorbers High-Ride Suspension Skid Plate Guard	Multi-Link Coil Gas Standard Standard	Multi-Link Coil Gas Standard Standard
Rear Wheel Suspension Shock Absorbers High-Ride Suspension Skid Plate Guard Engine Sump Guard	Multi-Link Coil Gas Standard Standard -	Multi-Link Coil Gas Standard Standard Standard
Rear Wheel Suspension Shock Absorbers High-Ride Suspension Skid Plate Guard Engine Sump Guard Transfer Case Guard	Multi-Link Coil Gas Standard Standard	Multi-Link Coil Gas Standard Standard
Rear Wheel Suspension Shock Absorbers High-Ride Suspension Skid Plate Guard Engine Sump Guard Transfer Case Guard WHEELS & TYRES	Multi-Link Coil Gas Standard Standard - -	Multi-Link Coil Gas Standard Standard Standard Standard
Rear Wheel Suspension Shock Absorbers High-Ride Suspension Skid Plate Guard Engine Sump Guard Transfer Case Guard WHEELS & TYRES Tyre Size	Multi-Link Coil Gas Standard Standard 255 / 60 R18	Multi-Link Coil Gas Standard Standard Standard Standard Standard
Rear Wheel Suspension Shock Absorbers High-Ride Suspension Skid Plate Guard Engine Sump Guard Transfer Case Guard WHEELS & TYRES Tyre Size Wheel Size / Type	Multi-Link Coil Gas Standard Standard 1 255 / 60 R18 18" X 7.0J Alloy	Multi-Link Coil Gas Standard Standard Standard Standard Standard 255 / 60 R18 18" X 7.0J Alloy
Rear Wheel Suspension Shock Absorbers High-Ride Suspension Skid Plate Guard Engine Sump Guard Transfer Case Guard WHEELS & TYRES Tyre Size Wheel Size / Type Spare Wheel Size / Type	Multi-Link Coil Gas Standard Standard 255 / 60 R18 18" X 7.0J Alloy	Multi-Link Coil Gas Standard Standard Standard Standard Standard 255 / 60 R18 18" X 7.0J Alloy
Rear Wheel Suspension Shock Absorbers High-Ride Suspension Skid Plate Guard Engine Sump Guard Transfer Case Guard WHEELS & TYRES Tyre Size Wheel Size / Type Spare Wheel Size / Type Turning Circle (m)	Multi-Link Coil Gas Standard Standard 1 255 / 60 R18 18" X 7.0J Alloy	Multi-Link Coil Gas Standard Standard Standard Standard Standard 255 / 60 R18 18" X 7.0J Alloy
Rear Wheel Suspension Shock Absorbers High-Ride Suspension Skid Plate Guard Engine Sump Guard Transfer Case Guard WHEELS & TYRES Tyre Size Wheel Size / Type Spare Wheel Size / Type Turning Circle (m) DIMENSIONS	Multi-Link Coil Gas Standard Standard - - 255 / 60 R18 18" X 7.0J Alloy 11.6	Multi-Link Coil Gas Standard Standard Standard Standard Standard 255 / 60 R18 18" X 7.0J Alloy 11.6
Rear Wheel Suspension Shock Absorbers High-Ride Suspension Skid Plate Guard Engine Sump Guard Transfer Case Guard WHEELS & TYRES Tyre Size Wheel Size / Type Spare Wheel Size / Type Turning Circle (m) DIMENSIONS Length (mm)	Multi-Link Coil Gas Standard Standard - - 255 / 60 R18 18" X 7.0J Alloy 18" X 7.0J Alloy 11.6	Multi-Link Coil Gas Standard Standard Standard Standard Standard 255 / 60 R18 18" X 7.0J Alloy 11.6
Rear Wheel Suspension Shock Absorbers High-Ride Suspension Skid Plate Guard Engine Sump Guard Transfer Case Guard WHEELS & TYRES Tyre Size Wheel Size / Type Spare Wheel Size / Type Turning Circle (m) DIMENSIONS Length (mm) Width (mm)	Multi-Link Coil Gas Standard Standard - - 255 / 60 R18 18" X 7.0J Alloy 18" X 7.0J Alloy 11.6 4 825 1 860	Multi-Link Coil Gas Standard Standard Standard Standard Standard 255 / 60 R18 18" X 7.0J Alloy 18" X 7.0J Alloy 11.6
Rear Wheel Suspension Shock Absorbers High-Ride Suspension Skid Plate Guard Engine Sump Guard Transfer Case Guard WHEELS & TYRES Tyre Size Wheel Size / Type Spare Wheel Size / Type Turning Circle (m) DIMENSIONS Length (mm)	Multi-Link Coil Gas Standard Standard - - 255 / 60 R18 18" X 7.0J Alloy 18" X 7.0J Alloy 11.6 4 825 1 860 1 860	Multi-Link Coil Gas Standard Standard Standard Standard Standard 255 / 60 R18 18" X 7.0J Alloy 11.6
Rear Wheel Suspension Shock Absorbers High-Ride Suspension Skid Plate Guard Engine Sump Guard Transfer Case Guard WHEELS & TYRES Tyre Size Wheel Size / Type Spare Wheel Size / Type Turning Circle (m) DIMENSIONS Length (mm) Width (mm)	Multi-Link Coil Gas Standard Standard - - 255 / 60 R18 18" X 7.0J Alloy 18" X 7.0J Alloy 11.6 4 825 1 860 1 860 2 845	Multi-Link Coil Gas Standard Standard Standard Standard Standard 255 / 60 R18 18" X 7.0J Alloy 18" X 7.0J Alloy 11.6 4 825 1 860 1 860 2 845
Rear Wheel Suspension Shock Absorbers High-Ride Suspension Skid Plate Guard Engine Sump Guard Transfer Case Guard WHEELS & TYRES Tyre Size Wheel Size / Type Spare Wheel Size / Type Turning Circle (m) DIMENSIONS Length (mm) Width (mm) Height (mm)	Multi-Link Coil Gas Standard Standard - - 255 / 60 R18 18" X 7.0J Alloy 18" X 7.0J Alloy 11.6 4 825 1 860 1 860	Multi-Link Coil Gas Standard Standard Standard Standard Standard 255 / 60 R18 18" X 7.0J Alloy 11.6 4 825 1 860 1 860
Rear Wheel Suspension Shock Absorbers High-Ride Suspension Skid Plate Guard Engine Sump Guard Transfer Case Guard WHEELS & TYRES Tyre Size Wheel Size / Type Spare Wheel Size / Type Turning Circle (m) DIMENSIONS Length (mm) Width (mm) Height (mm) Wheelbase (mm)	Multi-Link Coil Gas Standard Standard - - 255 / 60 R18 18" X 7.0J Alloy 18" X 7.0J Alloy 11.6 4 825 1 860 1 860 2 845	Multi-Link Coil Gas Standard Standard Standard Standard Standard 255 / 60 R18 18" X 7.0J Alloy 18" X 7.0J Alloy 11.6 4 825 1 860 1 860 2 845
Rear Wheel Suspension Shock Absorbers High-Ride Suspension Skid Plate Guard Engine Sump Guard Transfer Case Guard WHEELS & TYRES Tyre Size Wheel Size / Type Spare Wheel Size / Type Turning Circle (m) DIMENSIONS Length (mm) Width (mm) Height (mm) Wheelbase (mm) Front / Rear Track (mm)	Multi-Link Coil Gas Standard Standard - - 255 / 60 R18 18" X 7.0J Alloy 18" X 7.0J Alloy 11.6 4 825 1 860 1 860 2 845 1 570 / 1 570	Multi-Link Coil Gas Standard Standard Standard Standard Standard 255 / 60 R18 18" X 7.0J Alloy 18" X 7.0J Alloy 11.6 4 825 1 860 1 860 2 845 1 570 / 1 570
Rear Wheel Suspension Shock Absorbers High-Ride Suspension Skid Plate Guard Engine Sump Guard Transfer Case Guard WHEELS & TYRES Tyre Size Wheel Size / Type Spare Wheel Size / Type Turning Circle (m) DIMENSIONS Length (mm) Width (mm) Height (mm) Wheelbase (mm) Front / Rear Track (mm) Front Overhang (mm)	Multi-Link Coil Gas Standard Standard 255 / 60 R18 18" X 7.0J Alloy 18" X 7.0J Alloy 11.6 4 825 1 860 1 860 2 845 1 570 / 1 570 905	Multi-Link Coil Gas Standard Standard Standard Standard Standard 255 / 60 R18 18" X 7.0J Alloy 18" X 7.0J Alloy 11.6 4 825 1 860 2 845 1 570 / 1 570 905
Rear Wheel Suspension Shock Absorbers High-Ride Suspension Skid Plate Guard Engine Sump Guard Transfer Case Guard WHEELS & TYRES Tyre Size Wheel Size / Type Spare Wheel Size / Type Turning Circle (m) DIMENSIONS Length (mm) Width (mm) Height (mm) Wheelbase (mm) Front / Rear Track (mm) Front Overhang (mm) Rear Overhang (mm)	Multi-Link Coil Gas Standard Standard - - 255 / 60 R18 18" X 7.0J Alloy 18" X 7.0J Alloy 11.6 4 825 1 860 1 860 2 845 1 570 / 1 570 905 1 075	Multi-Link Coil Gas Standard Standard Standard Standard Standard 255 / 60 R18 18" X 7.0J Alloy 18" X 7.0J Alloy 11.6 4 825 1 860 1 860 2 845 1 570 / 1 570 905 1 075
Rear Wheel Suspension Shock Absorbers High-Ride Suspension Skid Plate Guard Engine Sump Guard Transfer Case Guard WHEELS & TYRES Tyre Size Wheel Size / Type Spare Wheel Size / Type Turning Circle (m) DIMENSIONS Length (mm) Width (mm) Height (mm) Wheelbase (mm) Front / Rear Track (mm) Front Overhang (mm) Rear Overhang (mm) Ground Clearance (mm)	Multi-Link Coil Gas Standard Standard 255 / 60 R18 18" X 7.0J Alloy 18" X 7.0J Alloy 11.6 4 825 1 860 1 860 2 845 1 570 / 1 570 905 1 075 230	Multi-Link Coil Gas Standard Standard Standard Standard Standard 255 / 60 R18 18" X 7.0J Alloy 18" X 7.0J Alloy 11.6 4 825 1 860 1 860 2 845 1 570 / 1 570 905 1 075 230
Rear Wheel Suspension Shock Absorbers High-Ride Suspension Skid Plate Guard Engine Sump Guard Transfer Case Guard WHEELS & TYRES Tyre Size Wheel Size / Type Spare Wheel Size / Type Turning Circle (m) DIMENSIONS Length (mm) Width (mm) Height (mm) Wheelbase (mm) Front / Rear Track (mm) Front Overhang (mm) Rear Overhang (mm) Ground Clearance (mm) Approach Angle (°)	Multi-Link Coil Gas Standard Standard 255 / 60 R18 18" X 7.0J Alloy 18" X 7.0J Alloy 11.6 4 825 1 860 1 860 2 845 1 570 / 1 570 905 1 075 230 24.0	Multi-Link Coil Gas Standard Standard Standard Standard Standard 255 / 60 R18 18" X 7.0J Alloy 18" X 7.0J Alloy 11.6 4 825 1 860 1 860 2 845 1 570 / 1 570 905 1 075 230 24.0

mu-×	3.0 AT	3.0 AT
DRIVE CONFIGURATION	4X2	4X4
MASS / CAPACITIES		
Gross Axle Mass - Front (GA1) (kg)	1 350	1 350
Gross Axle Mass – Rear (GA2) (kg)	1 600	1 600
Gross Vehicle Mass – (GVM) (kg)	2 650	2 750
Gross Combined Mass – (GCM) (kg)	5 650	5 750
Tare Mass (kg)	1 995	2 095
Payload (kg)	607	607
Towing Capacity (kg): Unbraked Trailer ²	750	750
Towing Capacity / Rating (kg): Braked Trailer ²	3 000	3 000
Fuel Tank Capacity (Litres)	65	65
SAFETY FEATURES		
Anti-Lock Braking System (ABS)	Standard	Standard
Electronic Brake-Force Distribution (EBD)	Standard	Standard
Brake-Assist System (BAS)	Standard	Standard
Electronic Stability Control (ESC) with Traction Control	Standard	Standard
Hill-Start Assist (HAS)	Standard	Standard
Hill Descent Control (HDC)	Standard	Standard
Trailer Sway Control	Standard	Standard
Height-Adjustable 3-Point Seatbelts	Standard	Standard
Seatbelt Pre-Tensioners	Standard	Standard
Driver & Front Passenger Airbags	Standard	Standard
Front Seat Side Airbags	Standard	Standard
Curtain Airbags	Standard	Standard
Side-Impact Bars (Front and Rear Doors)	Standard	Standard
Collapsible Steering Column	Standard	Standard
Speed-Sensitive Door Lock	Standard	Standard
ISOFIX Child Seat Attachment	Standard	Standard
Rear-View Camera	Standard	Standard
Rear Park Distance Sensors	Standard	Standard
SECURITY FEATURES		
Remote-Controlled Central Locking	Standard	Standard
Passive Entry Start System (PESS)	Standard	Standard
Anti-Theft Alarm System	Standard	Standard
Transponder Immobiliser System	Standard	Standard
INTERIOR / EXTERIOR LIGHTING		
Front Reading Lamps	Standard	Standard
Interior Courtesy Lamps	Standard	Standard
Ambient Lighting in Door Trim Panel	Standard	Standard
Luggage Lamp	Standard	Standard
Front Fog Lights	Standard	Standard
Daytime Running Lights (DRL)	LED	LED
Headlights	Bi-LED	Bi-LED
Headlights 'ON' Warning Buzzer	Standard	Standard
Headlamp Levelling	Automatic	Automatic
LED Combination Rear Taillights	Standard	Standard
High-Mounted Centre Stoplight	LED	LED
EXTERIOR FEATURES		
Radiator Grille – Colour	Chrome	Chrome
Front Bumper – Colour	Body Colour Upper / Gloss Black Lower	Body Colour Upper / Gloss Black Lower
Rear Bumper – Colour	Body Colour Upper / Gloss Black Lower	Body Colour Upper / Gloss Black Lower
Exterior Door Handles - Colour	Chrome	Chrome
Exterior Mirrors	Chrome – Power Adjustable & Folding with Side Indicator	Chrome – Power Adjustable & Folding with Side Indicator
B-Pillar Blackout	Standard	Standard

Standard – Gloss Black

Front & Rear

Standard – Gloss Black

Front & Rear

Side-Steps

Mudflaps

Disclaimer: Specifications correct as at time of printing and may subsequently change. Please contact your nearest dealer to confirm any specification changes. Date of print February 2020.

Fuel Economy & CO, data as per ECE R101 / SANS 20101 Regulation. Note that the actual fuel consumption will depend on many factors, including the driver's driving habits, prevailing conditions & the vehicle's equipment, condition and use.

Towing capacity subject to South African Road Traffic Act. The weight of the towing vehicle including trailer towball load must not exceed the Gross Vehicle Mass (GVM). The combined weight of the fully loaded vehicle and trailer must not exceed the Gross Combination Mass (GCM). Maximum individual axle loads (GA1 & GA2) must not be exceeded. (e.g. if a 3.0 Litre Diesel is towing 3 500 kg its Maximum Vehicle Mass is 2 500 kg in order to be within GCM).